


Wiring diagram 接线图



Label 标签

YZF10-20  
220-240V  
CL.B 1300r/min

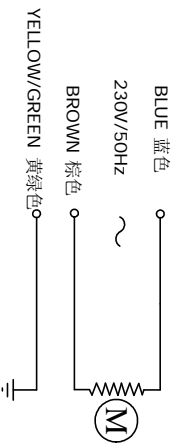


10/40W  
50/60Hz  
xx/2015

## SPECIFICATION 规格说明

MOTOR 电机型式	Shaded pole motor 罩极电动机
MOTOR TYPE 电机型号	YZF10-20/BALL
VOLTAGE 额定电压 (V)	230
FREQUENCY 频率 (Hz)	50/60
INPUT POWER 输入功率 (W)	40
CURRENT 电流 (A)	0.25
SPEED 负载转速 (r/min)	1300/1550
FAN BLADES 负载风叶	Φ230 / 28°
ROTATION 旋转方向	CCW (looking towards the shaft 从轴伸端视去逆时针方向)
AIRFLOW DIRECTION 风向	Sucking or Blowing 通过配不同扇叶实现吹吸风
MOTOR PROTECTION 电机保护方式	Impedance protection 阻抗保护
INSULATION CLASS 绝缘等级	Class B B级绝缘
TEMPERATURE RISE 温升	95K max (with load) 负载温升不超过95K
PROTECTION CLASS 防护等级	IP 42
OPERATING TYPE 工作定额	S1 连续工作制
MOUNTING TYPE 安装方式	Any angle 任意角度
AMBIENT TEMPERATURE 适用环境温度	-30°C +50°C
BEARINGS 轴承型式	Ball bearings 滚珠轴承
ELECTRICAL CONNECTION 电源线	RV-90 3G 0.5mm <sup>2</sup> lead wire 190-270mm free length 电源线长190-270mm, 型号: RV-90 3G 0.5mm <sup>2</sup>
HI-POT TEST 耐压测试	1800V/1s   leakage ≤ 0.7mA 1800V历时1秒, 泄漏电流 ≤ 0.7mA
APPROVALS 认证标记	CE
WEIGHT PER UNIT 单个电机净重	1.1kg
PACKING 包装	24PCS/CTN 24台/箱

REV.	DESCRIPTION	APPROVED	DATE	ANGLE	TOLERANCE	DECIMAL	SIGN	DATE	TITLE
					±0.5	X	DRN BY	04/01/2016	YZF10-20/BALL
					±0.25	X.X	CHD BY		
					±0.15	X.XX	ENG BY		
					±3°		APP BY		

PROJECTION



A4  
SCALE:  
SHEET: 1 of