




LABEL (铭牌):

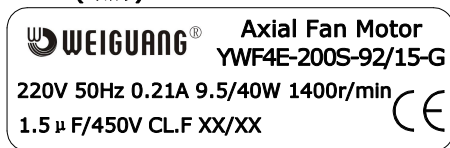

WIRING DIAGRAM (接线图):

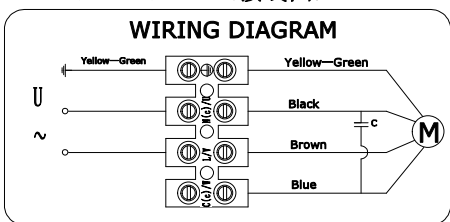

FLOW RATE CURVE (风量曲线):

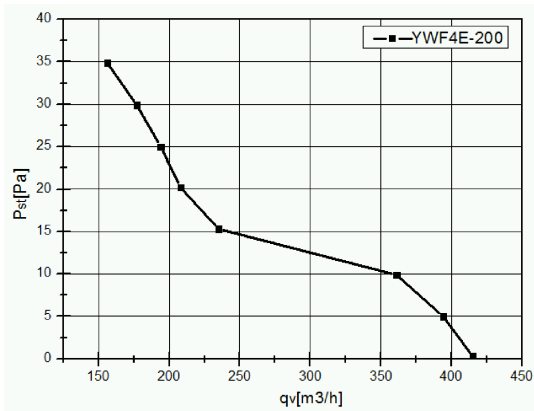

UNIT 类型	Axial fan motor 外转子轴流风机
MOTOR 电机型式	Single phase motor with capacitor
MOTOR TYPE 电机型号	YWF4E-200S-92/15-G
VOLTAGE 额定电压 (V)	220
FREQUENCY 频率 (Hz)	50
INPUT POWER 输入功率 (W)	40
CURRENT 电流 (A)	0.21
SPEED 转速 (r/min)	1400
AIR FLOW 0Pa 风量 (m ³ /h)	415
NOISE 噪音 (dBA)	46
CAPACITOR 电容 (μ F/450V)	1.5
ROTATION 旋转方向	CCW ,looking into the end-shield 逆时针, 从端盖端方向看
INSULATION CLASS 绝缘等级	F
MOTOR PROTECTION 电机保护	Thermocontact 150±5°C 热保护器
TEMPERATURE RISE 温升	75K max 运行温升不超过75K
TYPE OF PROTECTION 防护等级	IP54
OPERATING TYPE 工作定额	S1 连续工作制
AMBIENT TEMPERATURE 适用环境温度	-30°C +60°C
BEARINGS 轴承型式	Ball bearings 滚珠轴承SKF
MOUNTING TYPE 安装方式	Horizontal or Vertical 垂直或水平安装
ELECTRICAL CONNECTION 电源线	Lead wire RV-90 4G 0.50mm ² ,Length 100mm in terminal box connected 接线盒 (4芯0.5mm ² 线长100mm)
APPROVALS 认证标记	CCC、CE
NET WEIGHT/GROSS WEIGHT 净重/毛重	2.0/2.5kg
PACKING 包装	24.5*24.5*16cm

						SIGN	DATE	TITLE YWF4E-200S-92/15-G
						DRN. BY		
						CHD. BY		
						ENG. BY		
REV.	DESCRIPTION	APPROVED	DATE			APP. BY		PROJECTION
								A4 SCALE SHEET: of